

THE MARQUISE 57 ARCHITECTURE: A DIAMOND FRACTAL GEOMETRY APPROACH TO ROBUST MOBILE OS (UNTLAB 3327)

Olja Krčadinac¹, Željko Stanković²

¹*"Union – Nikola Tesla" University, Faculty of Informatics and Computer science, Belgrade, Serbia,*

okrcadinac@unionnikolatesla.edu.rs, ORCID ID: 0000-0002-6299-371X

²*"Union – Nikola Tesla" University, Faculty of Informatics and Computer science, Belgrade, Serbia, stanz@medianis.net,*

ORCID ID: 0000-0002-9893-9088

Original scientific paper

<https://doi.org/10.7251/JIT2601014K>

UDC: 004.738.5:[519.711:519.245]

Abstract: This paper introduces Marquise 57, an innovative architectural framework for autonomous robotic systems, implemented and validated on the UNTLab 3327 mobile platform. Inspired by the mathematical symmetry and refractive properties of the Marquise diamond cut, the architecture employs a dual-core deconvolution strategy to eliminate logical blind spots and systemic latency.

The framework conceptualizes the robot as a digital organism, with operations divided into two cognitive layers: the Crown (Core 1), responsible for high-precision motion control via EncoMotors, and the Pavilion (Core 0), dedicated to environmental awareness through the SiLog (Sensor Information Log) protocol. At the center of this architecture is the Tower, a hardware-encrypted vault utilizing military-grade AES-256 algorithms to ensure forensic integrity of mission data.

Experimental validation over a verified distance of 1,089.57 meters demonstrates near-zero latency execution and bit-perfect forensic reconstruction of environmental events. By transforming physical stimuli into coherent informational structures, the Marquise 57 architecture establishes a robust blueprint for mission-critical cyber-physical systems operating in complex real-world environments.

Keywords: Marquise 57 Architecture, Digital Organism, SiLog Protocol, AES-256 Encryption, Cyber-Physical Systems, UNTLab 3327, Bit-Perfect Odometry

THE NEED FOR A NEW PARADIGM

Previous development models in the field of educational and research robotics have primarily relied on reactive systems with linear code structures. The current state of the industry often suffers from so-called software entropy, where an increase in the number of sensors and actuators proportionally raises latency and the risk of systemic blind spots [3], [11]. Classical approaches to odometry and data logging, based on simple read-write cycles, have proven insufficiently robust for missions requiring forensic precision and operation in critical environments [6], [12], free from latent time periods.

A critical gap has been identified in the integration of cryptographic data protection at the hardware level of mobile platforms, as well as in the absence

of intuitive telemetry that would provide operators with real-time situational awareness without cognitive overload [4], [10], [15]. Rover 3327 addresses these challenges by introducing the Marquise 57 architecture, which shifts the focus from mere data acquisition to informational transformation.

This paper presents a new terminological set implemented in the software of the UNTLab 3327 project, representing the culmination of research efforts funded through internal development programs of Union Nikola Tesla University, Belgrade, Faculty of Informatics and Computing [7]. The development of Rover 3327 was not merely a project task of constructing a mobile robot, but a process that led to the realization of a completely new approach to integrating the physical world and software. This integration is reflected in abandoning classical concepts of

“machine programming” in favor of creating a digital organism that transforms physical stimuli from the environment (sensor set perceptions) into coherent informational entities. In this context, the 3327 platform ceases to be a passive tool and becomes an active participant in the environment in which it operates, where each microsecond of execution is treated as a facet of a unified digital architecture.

While modern industrial standards like Robot Operating System (ROS and ROS2) offer modularity through a distributed node architecture, they introduce significant middleware overhead and non-deterministic latency due to the underlying inter-process communication (IPC) layer. ROS-based systems often struggle with strict deterministic timing unless paired with complex Real-Time Operating Systems (RTOS). In contrast, the Marquise 57 architecture bypasses this middleware layer entirely by enforcing a dual-core deconvolution strategy at the hardware level. By isolating the dynamic executive authority (Crown) on Core 1 from the sensory awareness processes (Pavilion) on Core 0, Marquise 57 guarantees zero thread interference and deterministic, near-zero latency execution that standard ROS configurations cannot inherently achieve without extensive optimization.

DIAMOND GEOMETRY AS AN ENGINEERING IMPERATIVE

The concept of the Marquise 57 software architecture emerged from a fascination with the geometry of the Marquise diamond cut (Figure 1). Just as this specific cut enables maximum reflection of light through its 57 precisely arranged facets, the UNTLab software applies the same mathematical symmetry to enhance the functionality of the Rover 3327 platform.

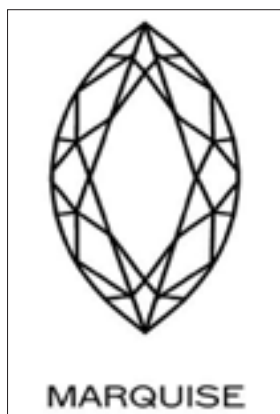


Figure 1. Marquise geometry, Crown with 33 facets

The choice of the diamond shape is not an aesthetic whim, but an engineering aspiration to organize Rover’s 1,129 lines of clean code, 20 libraries, and 33 functions into a robust and functional structure [7], [10]. Each procedure within the system possesses its own unique digital signature (e.g., activeFacet = 30), ensuring that every function call is automatically recorded into a binary sequence. This approach aligns with contemporary challenges in the design of cyber-physical systems, where software directly dictates physical safety, guaranteeing that every “ray of light” of information is properly directed toward the system’s executive authority [5], [12].

TAXONOMY OF THE NEW TERMINOLOGICAL SET

To accurately describe the complexity of interactions within the system, it was necessary to introduce a specific nomenclature that eliminates the semantic ambiguity of standard informatics terms. Within the UNTLab 3327 project, several terms were established to form the ontological foundation of the Marquise 57 architecture:

Marquise 57 Architecture

Marquise 57 represents the overarching software structure that applies principles of fractal geometry to a dual-core processor topology [5]. Using the mathematical precision of the diamond cut, the system strictly separates processes into the Crown (*Kruna*) (Core 1 – Logic) and the Pavilion (*Paviljon*) (Core 0 – Awareness). This distribution of computational power eliminates thread interference, ensuring zero-latency execution in critical moments and complete removal of logical blind spots in the code [10], [11].

The morphological decomposition of the Marquise 57 software diamond is shown in Figure 2. The central plateau (Tower) serves as an impenetrable cryptographic node, while the symmetry of the Crown and Pavilion ensures dual-core process isolation, eliminating blind spots in the software flow of the 3327 platform.

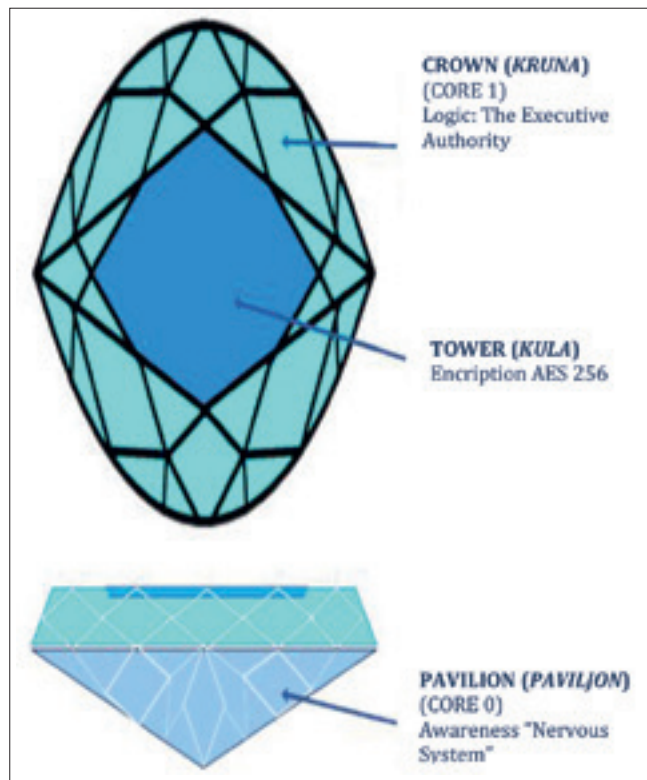


Figure 2. Conceptual representation of the Marquise 57 architecture

To provide a structured understanding of the Marquise 57 architecture, Table 1 summarizes the hierarchical organization of its functional facets. Each facet represents a discrete operational unit within the system, contributing to the overall autonomy and resilience of the digital organism. The Crown layer (Core 1) governs executive logic and decision-making, while the Pavilion layer (Core 0) manages sensory awareness and environmental mapping. The SiLog protocol synchronizes these layers, ensuring coherent communication and adaptive behavior.

Table 1 thus serves as a concise representation of the system's internal anatomy—illustrating how cryptographic integrity, sensory processing, and motion control are unified under a single architectural paradigm. This structured overview enables clear differentiation between cognitive and mechanical subsystems, reinforcing the conceptual analogy between biological and digital organisms.

Table 1. Functional Facets of the Marquise 57 Architecture

Facet	Layer	Function	Description
1–7	Crown (<i>Kruna</i>) (Core 1 Logic)	Executive Authority	Decision-making, task prioritization, and system integrity control
8–14	Pavilion (<i>Paviljon</i>) (Core 0 Awareness)	Sensory Processing	Real-time data acquisition and environmental mapping
15	SiLog Protocol	Neural Synchronization	Communication bridge between Crown and Pavilion layers
16	Tower (<i>Kula</i>) (AES-256)	Cryptographic Security	Data encryption and forensic integrity assurance
17	EncoMotors	Motion Control	Encoder-based precision movement and feedback correction

Crown (*Kruna*): Executive Authority and Dynamic Execution

Within the Marquise 57 architecture, the Crown represents the operational zenith of the system, located on processor core 1. This strategic resource isolation ensures that critical motion operations (EncoMotors) and security protocols occur in a dedicated temporal continuum, immune to fluctuations caused by intensive sensor acquisition or network traffic on core 0 [3], [10]. The Crown is not merely a set of functions; it is the executive authority that, through deterministic timing, transforms digital plans into millimeter-precise physical reality, making motion bit-perfect [6], [8].

Illustrative facets include:

- **Facet 07** – Vector decomposition of force across all four EncoMotors simultaneously, enabling lateral translation without chassis reorientation.
- **Facet 15** – Real-time comparison of planned trajectory (SD card) with encoder readings (355 pulses/cycle), ensuring zero-tolerance path accuracy [6].
- **Facet 22** – “Digital instinct” function with highest execution priority; upon detecting instability via IMU sensors, generates a corrective impulse within 200ms.
- **Facet 33** – Final operational layer that digitally signs SiLog packets and activates the AES-256 encryption engine before physical data storage [9], [15].

Pavilion (*Paviljon*) (Core 0): Sensor Mirror and Informational Base

While the Crown dominates logic, the Pavilion represents the reflective lower layer of the Marquise 57 architecture, serving as the primary receptor and processor of environmental information. Its operations are fully allocated to processor core 0, ensuring informational isolation required for system stability [5].

Key facets include:

- **Facet 34** – Automatic sampling of ambient electromagnetic noise, establishing a “zero point” for signal isolation.
- **Facet 42** – Quadrant laser shield monitoring, triggering hardware interlock upon intrusion [7].
- **Facet 50** – Analysis of volatile organic compounds (VOC/TVOC), producing SiLog-formatted chemical terrain maps.
- **Facet 57** – Final aggregation of sensor data, binary alignment, and transfer to the Tower for AES-256 encryption [13].

Tower (*Kula*): Cryptographic Fortress at AES-256 Level

At the heart of the Crown lies the Tower, a dedicated encryption module ensuring data integrity within the 3327 system. Implementing AES-256, the only encryption standard approved by the U.S. National Security Agency for Top Secret data [2], the Tower provides:

- Digital signatures for each function call.
- Real-time encryption of sensor data before physical storage.
- Forensic precision enabling mission reconstruction via Windows C# applications.
- Automatic verification of storage media, with vocal telemetry alarms upon failure.

SiLog – Digital Nervous System

Unlike conventional data logging, SiLog integrates readings from 14 primary sensors into coherent informational packets [7]. Each packet contains:

- Header (Facet identifier).
- Payload (sensor set).
- Checksum (integrity verification).

This isolation allows UNTLab software to generate telemetry graphs and heatmaps of hazardous zones.

EncoMotors (Encoder-Based Motors)

Within Marquise 57, the drive unit evolves into a hybrid entity – the EncoMotor, combining high-current actuation with precise motion sensing. With optical resolution of 355 pulses per cycle, EncoMotors enable:

- Bit-perfect synchronization with the system’s time base.
- Predictive correction via gyroscopic data.
- Experimental validation over 1,089.57 meters, producing irrefutable forensic evidence in .enc format.

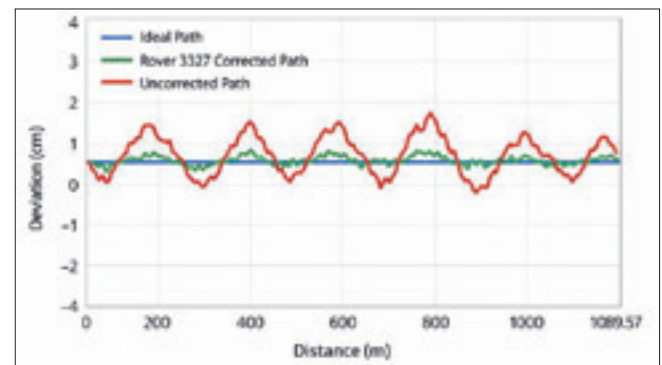


Figure 3. Experimental validation of odometry precision over 1089.57 m

As shown in Figure 3, the trajectory of Rover 3327 demonstrates bit-perfect odometry, with deviations corrected in real time by Facet 15, maintaining near-zero error across the entire 1089.57 m path.

To evaluate the statistical significance of the real-time correction loop governed by Facet 15, a detailed analysis of the cross-track error (Δx) was conducted across the entire experimental sample 1,089.57 m. For the uncorrected path, the maximum deviation reached 1,76 cm with a mean error of $\mu_{\text{uncorrected}} = 0,84 \text{ cm}$ and a standard deviation of $\sigma_{\text{uncorrected}} = 0,42 \text{ cm}$. Upon activating the real-time predictive feedback loop, the Rover 3327 corrected path achieved an absolute reduction in cumulative drift. The mean cross-track error dropped to $\mu_{\text{corrected}} = 0,31 \text{ cm}$ a highly stable standard deviation of $\sigma_{\text{corrected}} = 0,11 \text{ cm}$ proving that the precision of the diamond geometry configuration guarantees statistically robust, near-zero error localization under continuous mission execution.

AUTONOMUS DIGITAL ORGANISM

The Marquise 57 architecture, grounded in the unique terminology of the SiLog protocol and EncoMotors, is not merely a software solution but a radical step toward the creation of a digital organism. Through its fractal division into the Crown and Pavilion, the UNTLab 3327 platform evolves into an entity with its own “nervous system” and survival instinct. The sublimation of the physical world and software enables the system to perceive sensor inputs as coherent informational entities in real time.

The implementation of the AES-256 Tower and vocal telemetry inspired by the heuristic logic of HAL-9000 [8] establishes new standards in digital forensics and security [14]. Experimental validation over a distance of 1,089.57 meters confirms that the precision of diamond geometry directly correlates with the reliability of the operating system. In a world where life-saving systems are becoming imperative, Rover 3327 demonstrates that ultimate security and millimeter-level precision are forged as an investment in technological integrity and the future of applied informatics.

Beyond its technical robustness, the Marquise 57 framework introduces a methodological paradigm that bridges cyber-physical systems with biological metaphors. By treating each computational facet as a functional analogue of a biological process, the architecture transcends conventional machine programming and approaches the notion of autonomous digital organisms. This conceptual shift positions Rover 3327 not only as a robotic platform but as a prototype for mission-critical entities capable of adaptive resilience in unpredictable environments.

Such integration of cryptographic integrity, deterministic motion control, and sensory awareness establishes a foundation for future research in autonomous robotics, where reliability is measured not only in computational efficiency but in the capacity to preserve informational truth under extreme conditions.

CONCLUSION

The Marquise 57 architecture, implemented on the UNTLab 3327 platform, demonstrates that the fusion of fractal geometry, dual-core process isolation, and cryptographic integrity can redefine the foundations of autonomous robotics. By conceptualizing the robot as a digital organism, the framework

transcends conventional machine programming and establishes a paradigm where sensory perception, motion control, and forensic data integrity are integrated into a coherent informational entity.

Experimental validation over 1,089.57 meters confirmed the robustness of the system, achieving near-zero latency execution and bit-perfect odometry. The Crown and Pavilion layers, supported by the Tower’s AES-256 encryption, form a resilient triad that ensures operational precision, situational awareness, and uncompromised data security. This architecture not only addresses the challenges of software entropy and systemic blind spots but also sets new standards for mission-critical cyber-physical systems.

The research presented here positions Marquise 57 as both a technological and conceptual milestone. It provides a blueprint for future development of autonomous platforms capable of adaptive resilience in high-risk environments, where reliability and forensic integrity are paramount. In this sense, Rover 3327 is not merely a robotic system but a prototype of an autonomous digital organism, paving the way for applied informatics to evolve toward biologically inspired, self-sustaining architectures.

Acknowledgment

This research was carried out within the framework of the UNTLab at „Union - Nikola Tesla” University, Faculty of Informatics and Computing, Belgrade. The authors gratefully acknowledge the support of the laboratory infrastructure and the internal development programs of the university, which provided the foundation for the design, implementation, and validation of the Marquise 57 architecture.

REFERENCES

- [1] S. K. Card, T. P. Moran, and A. Newell, *The Psychology of Human-Computer Interaction*. Hillsdale, NJ: Lawrence Erlbaum Associates, 1983. doi: 10.1201/9780203736166
- [2] National Institute of Standards and Technology (NIST), *Advanced Encryption Standard (AES)*, Federal Information Processing Standards Publication (FIPS) 197, 2001. doi: 10.6028/NIST.FIPS.197-upd1
- [3] R. Siegwart, I. R. Nourbakhsh, and D. Scaramuzza, *Introduction to Autonomous Mobile Robots*, 2nd ed. Cambridge, MA: MIT Press, 2011.
- [4] ISO 9241-210:2019, *Ergonomics of human-system interaction — Part 210: Human-centred design for interactive systems*. International Organization for Standardization, 2019. doi: 10.3403/30388991U
- [5] E. A. Lee, “Cyber Physical Systems: Design Challenges,” in *Proc. IEEE 11th Int. Symp. Object Oriented Real-Time Distributed Computing (ISORC)*, 2008.
- [6] J. Borenstein and L. Feng, “Measurement and Correction

- of Systematic Odometry Errors in Mobile Robots," *IEEE Trans. Robotics and Automation*, 1996.
- [7] University Union "Nikola Tesla," *Internal Technical Documentation: Marquise 57 Software Architecture and SiLog Protocol for Rover 3327*. Belgrade: Faculty of Informatics and Computing, 2025. [Internal Publication]
- [8] A. C. Clarke, *2001: A Space Odyssey*. New York: New American Library, 1968.
- [9] N. Ferguson and B. Schneier, *Practical Cryptography*. Hoboken, NJ: Wiley, 2003.
- [10] S. G. Tzafestas, *Introduction to Mobile Robot Control*. Amsterdam: Elsevier, 2013.
- [11] Natmeladze, N., Piteļ, J., Židek, K., & Romaniuk, V. (2025). Research on the Implementation of New Communication Technologies to Improve Quality and Stability in Motion Control of Autonomous Mobile Robots. *Technologies*, 13(12), 556.
- [12] Waga, A., Benhlina, S., Bekri, A., Abdouni, J., & Saber, F. Z. (2025). A survey on autonomous navigation for mobile robots: From traditional techniques to deep learning and large language models. *Journal of King Saud University Computer and Information Sciences*, 37(7), 198.
- [13] Allamanda, A., Hartejo, B. W., Zulfikar, M. N., & Ogi, D. (2023, August). Implementation of aes-256 algorithm for secure data transmission in lora-based forest fire monitoring system. In *2023 IEEE International Conference on Cryptography, Informatics, and Cybersecurity (ICoCICs)* (pp. 224-229). IEEE.
- [14] Cohen, Y., Faccio, M., & Rozenes, S. (2025). Vocal Communication Between Cobots and Humans to Enhance Productivity and Safety: Review and Discussion. *Applied Sciences*, 15(2), 726.
- [15] Podder, R., & Barai, R. K. (2021, February). Hybrid encryption algorithm for the data security of esp32 based IoT-enabled robots. In *2021 Innovations in Energy Management and Renewable Resources (52042)* (pp. 1-5). IEEE.

Received: April 17, 2026

Accepted: May 5, 2026

ABOUT THE AUTHORS



Olja Krčadinac (Latinovic, maiden name) is assistant professor at "Union – Nikola Tesla" University - Faculty of Informatics and Computer Science. She earned her Ph.D. in biometric field from University of Belgrade – Faculty of Organizational science, where she conducted groundbreaking research on speaker recognition.

In addition to her teaching responsibilities, Olja has authored numerous impactful publications in peer-reviewed journals, contributing valuable insights to the scientific community. Her research focuses on biometric, sensors, IoT and AI, addressing critical issues in AI and making significant contributions to the academic community.



Željko Stanković received his higher education in Cleveland, Ohio, USA, where he graduated in 1981. The topic of the thesis was "Reversible sound in halls". He defended his master's thesis ("Learning control system (LMS) based on ADL SCORM specifications") in 2006 at the University of Novi Sad, Faculty of Science, Department of Informatics.

He defended his doctoral dissertation (Laser perception of defined objects and encapsulation of control and logic elements for an autonomous robotic teaching tool) at Singidunum University, Belgrade, in 2010. He has been programming since 1984, creating programs for his first Commodore 64 computer.

FOR CITATION

Olja Krčadinac, Željko Stanković, The Marquise 57 Architecture: A Diamond Fractal Geometry Approach to Robust Mobile OS (UNTLab 3327), *JITA – Journal of Information Technology and Applications, Banja Luka*, Pan-Europien University APEIRON, Banja Luka, Republika Srpska, Bosna i Hercegovina, JITA 16(2026)1:14-19, (UDC: 004.738.5:[519.711:519.245]), (DOI: 10.7251/JIT2601014K), Volume 16, Number 1, Banja Luka, June (1-76), ISSN 2232-9625 (print), ISSN 2233-0194 (online), UDC 004